



150m HDMI Wallplate Transmitter HE-150U-T-W



User Manual

Thank you for purchasing this product.

Please read this manual carefully before use to ensure optimal performance and safety.

Please retain this manual for future reference.

Copyright

Copyright © 2026 Taska Technology Limited. All Rights Reserved.

All content in this manual is proprietary and protected under international copyright laws. No part may be reproduced, translated, or distributed without prior written permission.

Information in this document are for reference only. It may be changed, deleted, or updated any content at any time and without prior notice.

Safety and Compliance

FCC Statement (Class A)

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

European Community Compliance Statement (Class A)

This product is herewith confirmed to comply with the requirements set out in the Council Directives on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive 2014/30/EU.

Disposal of This Product

This product must not be disposed of with household waste. Please recycle it responsibly at a designated collection point for electronic waste in your country.

Trademarks

All trademarks in this document are the properties of their respective owners.

Contents

What's in the box?	3
Overview	3
Features	3
Panel Description	4
Front Panel	4
Back Panel	4
IR Cable Defination	5
Operation Guide	5
Getting to start	5
Technical Specifications	6
Warranty	7

What's in the box?

HE-150U-T-W.....	x 1
3pin-3.81mm Phoenix Connector (male)	x 2
2pin-3.81mm Phoenix Connector (male)	x 1
Interchangable 24V 1A Power Adapter	x 1
UK Plug	x 1
US Plug	x 1
AU Plug	x 1
EU Plug	x 1
Thank you Card	x 1

Notice

The contents of this manual are subject to change without prior notice as part of continuous product improvement. All updates will be incorporated into subsequent versions of this documentation, ensuring users have access to the most current information regarding product features and procedures.

Overview


Taska **HE-150U-T-W** is an innovative 86×86mm wall plate extender that integrates both HDMI and USB-C input interfaces. It leverages an optimized version of HDBaseT technology. It is designed to transmit high-definition audio/video, along with bi-directional IR, RS-232, and CEC control signals over a single CAT6 cable for distances up to 150 meters. Supporting ultra-high definition up to 4K2K@60Hz (4:4:4), comprehensive advanced audio, and HDR formats, it also features bi-directional PoC. This multifunctional extender is the ideal all-in-one solution for video conferencing, multimedia teaching, and digital signage applications.

Features


- HDCP 2.2 / HDCP 1.4 and DVI 1.0 compliant.
- Support 18Gbps video bandwidth.
- The maximum extended transmission distance via a single CAT5e/6 cable:
 - 394ft/120m for 4K2K signal;
 - 492ft/150m for 1080P signal
- Support two inputs: 1× HDMI and 1× USB-C.
- Support auto switching and manual switching
- With bi-directional IR, RS-232 and CEC control signal transmission.
- HDR, HDR 10+, Dolby Vision, and HLG pass-through.
- Bidirectional PoC (Power over Cable) functionality.
- Design for standard 1-Gang UK 86×86mm wall plate.

Panel Description

Front Panel

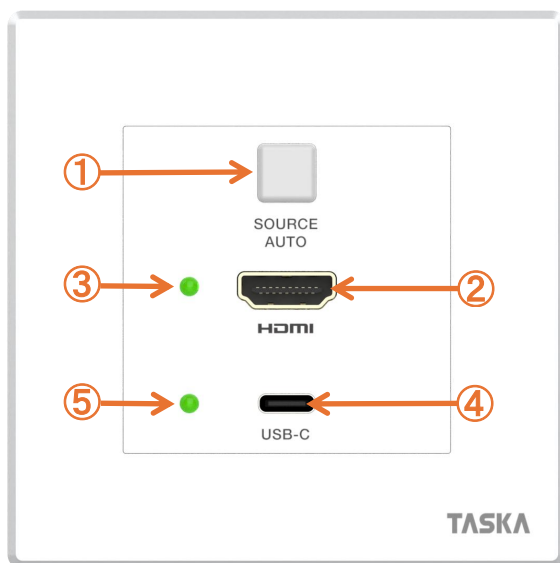


Back Panel

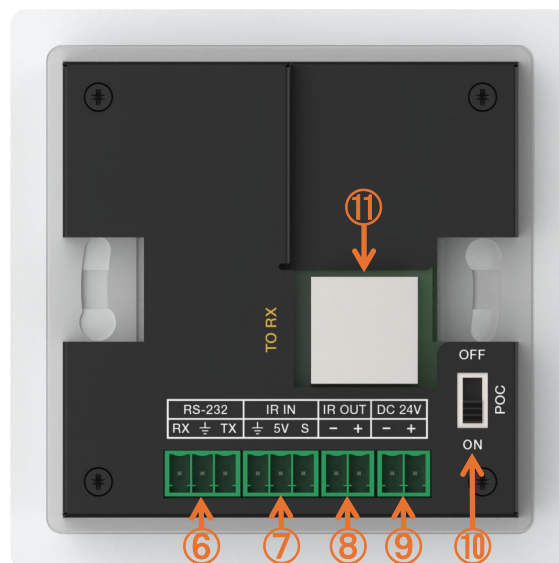

No.	Name	Function Description
1	SOURCE / AUTO button & indicator	Press to toggle the active input source between USB-C and HDMI . To enable or disable automatic input switching, press and hold the button for 3 seconds . A steady blue indicator light shows that auto-switching is active.
2	HDMI port	HDMI Input. Connect to an HDMI signal source device via an HDMI cable.
3	HDMI LED	Lights up to indicate that HDMI is the currently selected input source.
4	USB-C port	USB-C video signal input. Connect to a compatible USB-C video source
5	USB-C LED	Lights up to indicate that USB-C is the currently selected input source.
6	RS-232 port	Serial Control Port. Used for RS-232 signal pass-through.
7	IR IN port	IR Input. Connect to an IR receiver which is bundled.
8	IR OUT port	IR Output. Connect to an IR transmitter which is bundled.
9	DC 24V	DC 24V/1A Power Input. This is the DC power input port.
10	PoC Switch	A physical toggle to control Power over Cable (PoC). Set the switch to ON to activate PoC, enabling the unit to receive power from the connected device at the opposite end of the cable. Set the switch to OFF to disable PoC and power the unit locally using its own power adapter.
11	TO RX port	TO RX Signal Input Port. Connect this port to the FROM TX port on the receiver using a CAT6/6A cable. This connection supports bidirectional PoC (Power over Cable) functionality.

IR Cable Definition

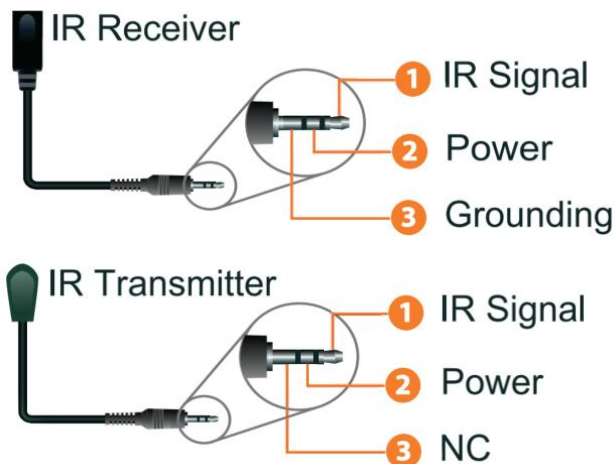

Operation Guide

Getting to start

Power

Use the bundled power adapter or receive PoC (Power over Cable) from the receiver.

Source

Connect your source to **HDMI IN** or **USB-C**.

Connection


Use a Cat6/6e cable between the transmitter's **TO RX** and the receiver's **FROM TX** port.

IR Control

For remote control, connect the IR Receiver to **IR IN** and the IR Transmitter to **IR OUT**.

RS-232

You can also wire an RS-232 connection directly between the transmitter and receiver units.

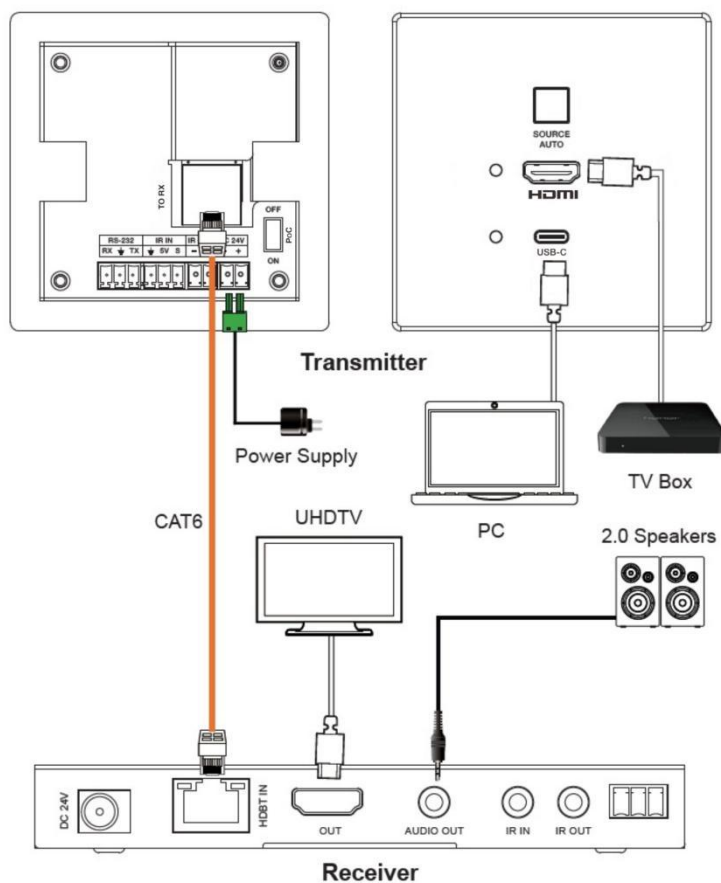

Technical Specifications

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2
Video Bandwidth	18Gbps
Input Video Resolutions	4K2K 50/60Hz 4:4:4; 4K2K 50/60Hz 4:2:2; 4K2K 50/60Hz 4:2:0; 4K2K 30Hz 4:4:4 1080p, 1080i, 720p, 720i, 480p, 480i All HDMI 3D TV formats All PC resolutions including 1920 x 1200
Color Space	RGB 4:4:4, YCbCr 4:4:4/4:2:2/4:2:0
Color Depth	8/10/12-bit (1080P60Hz, 4K30Hz, 4K60Hz YCbCr 4:2:2/4:2:0) 8-bit (4K60Hz 4:4:4)
HDR	HDR, HDR10, HDR10+, Dolby Vision, HLG
Audio Formats	HDMI IN: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS-X
Transmission	HDMI passive cable 3m CAT6/6A cable 120m@4K60 CAT6/6A cable 150m@1080P
IR Frequency	20K-60KHz
IR Level	5Vp-p
Connection	
Input	1 x HDMI IN [Type A, 19-pin female] 1 x USB-C IN [USB Type C, 24-pin female]
Output	1 x TO RX [RJ45 connector, supporting PoC]
Control	1 x RS-232 [3pin-3.81mm Phoenix connector] 1 x IR IN [3pin-3.81mm Phoenix connector] 1 x IR OUT [3pin-3.81mm Phoenix connector]
Mechanical	
Color	White+Black
Dimensions	86mm [W] × 86mm [D] × 40mm [H]
Weight	215g
Electrical	
Power Consumption	~4.5W
Power Supply	2pin-3.81mm Phoenix connector: DC 24V/1A
Environment	
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Operating Humidity	20~80% RH (Non-condensing)
Storage Humidity	10~90% RH (Non-condensing)

Warranty

Taska Technology Limited warrants that the **HE-150U-T-W** is free from defects in materials and workmanship under normal use for a period of 60 months (5 years) from the original date of purchase. To obtain warranty service, customers must contact their local authorized Taska distributor.

This warranty does not apply under the following conditions:

- A. Damage resulting from negligence, accident, lightning, water, acts of God, or improper handling;
- B. Failure to operate the equipment in accordance with the procedures specified in the official user manual;
- C. Repairs, modifications, or alterations performed by unauthorized service centers;
- D. Removal, alteration, or defacement of the original product serial number;
- E. Damage caused by the use of unauthorized external equipment that affects performance, safety, or reliability;
- F. Products for which replacement parts or components are discontinued and no longer available.

Proof of purchase is required for all warranty claims.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.